


Air FR + L 2 Pc. (Combination + Lubricator)

Features

- ▶▶ Heavy Duty Design
- ▶▶ Precise Regulating Lubrication
- ▶▶ Simple to Maintenance
- ▶▶ Easy to Installation
- ▶▶ Type of Oil to be used ISO VG32
- ▶▶ Turn "T" Type Key Clock Wise to Increase Pressure

Technical Specification

Model	AL-S-02	AL-S-04
Size	1/4"	1/2"
Opr. Pressure	10 Kg/cm ² (max.)	
Temperature	50 °C (max.)	
Seals	NBR	
Media	Compressed air	

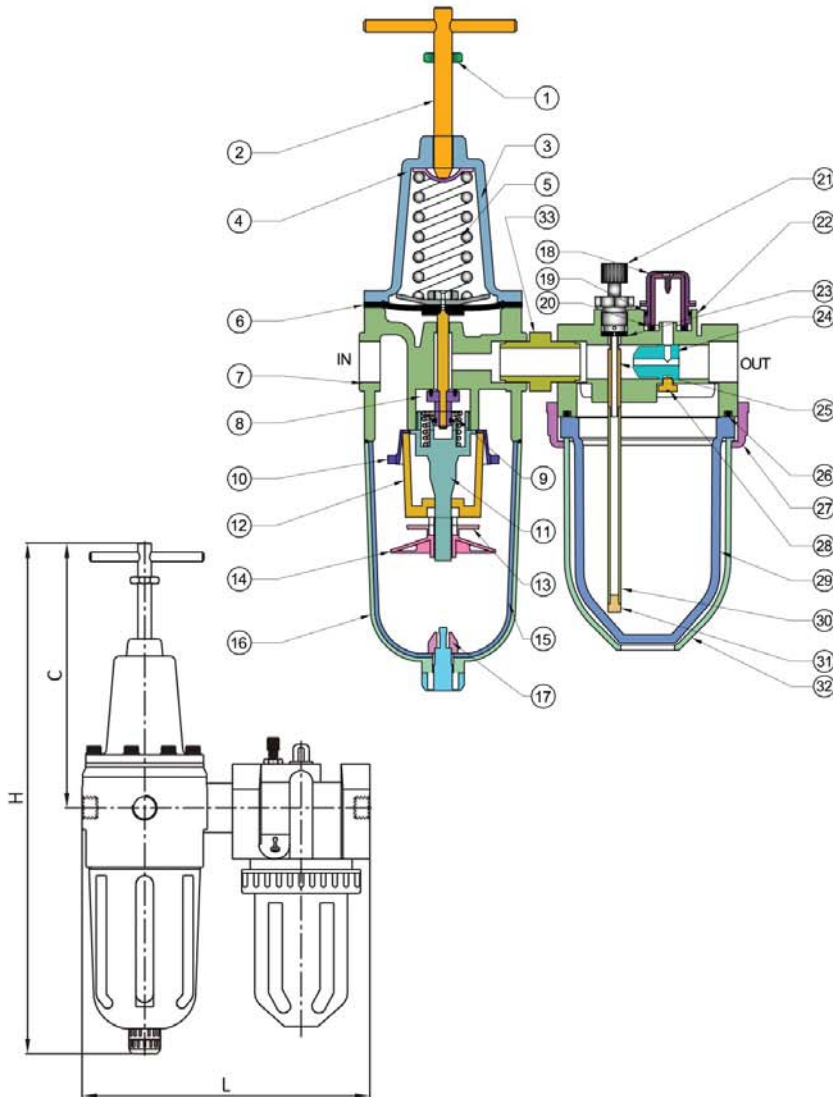

No.	Part Name	Material
1	Check Nut	Brass Plated
2	Adjusting Stud	Steel Plated
3	Bonnet	Aluminum Pressure Die Cast
4	Spring Plate	Steel / Aluminum
5	Pressure Spring	Spring Steel
6	Diaphragm	Imported P. U.
7	F + R Body	Aluminum Pressure Die Cast
8	Plunger	Brass with Rubber Mold
9	Plunger Spring	Spring Steel
10	Deflector	Nylon
11	Guide	Nylon
12	Filter Element	Poly Porous (25 Micron)
13	Baffle Plate	Nylon
14	Baffle	Nylon
15	Bowl	Poly Carbonate
16	Safety Guard	Nylon
17	Drain Cock Assembly	Nylon
18	Indicator Dom	Poly Carbonate
19	'O' Ring	NBR
20	'O' Ring	NBR
21	Oil Adjusting Assembly	Brass
22	Lubricator Body	Aluminum Pressure Die Cast
23	Rubber Washer	NBR
24	Distributor	Nylon
25	Tube	Brass
26	'O' Ring	NBR
27	Ring	Aluminum Pressure Die Cast
28	Screw	Steel Plated
29	Bowl	Poly Carbonate
30	Oil Pipe	P. U.
31	Filter Element	Brass
32	Bowl Guard	Nylon
33	Connector	Aluminum / Galvanize

Dimensions :

(All Dimensions are in mm)

MODEL	SIZE	L	A	C	Flow SCFM at 5 Bar	Weight (Kg.) Approx.
AFR+L+S-02	1/4"	325	175	164	530	1.650
AFR+L+S-04	1/2"	325	175	164	530	1.600